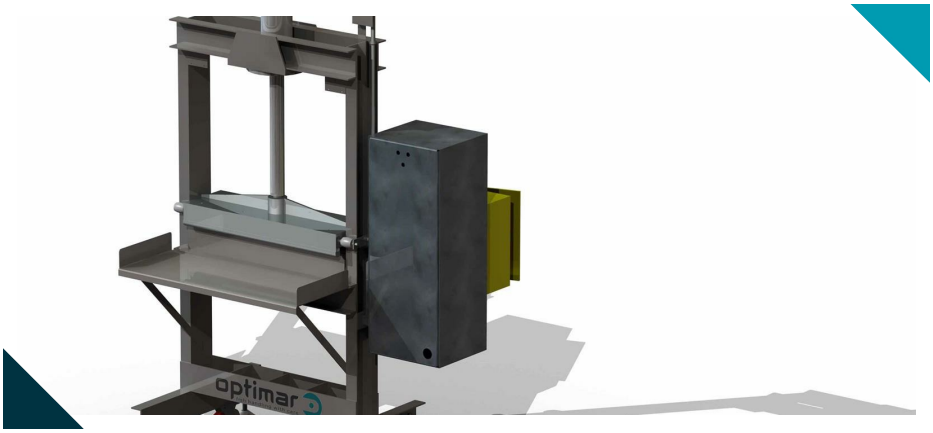

SPECIFICATIONS

Constructions	Stainless Steel Aisi 304
Power installed	5 CV
Reinforced structure, constructed of sections of formed plate 6 mm thick.	
21/2" draining valve.	
Driving by a hydraulic unit with gear pump.	
Semi-automatic working program.	

BLOCK CRUSHER

Designed and developed in order to separate frozen product and the plastic film used to build the layered frozen blocks.

To do so, the block, placed sideways in the tray designed for the task, is crushed by a hydraulic actuator in the direction of the plastic film breaking up the block.

The product is picked up on a machine's inferior tray, from where it will be taken to the next process.

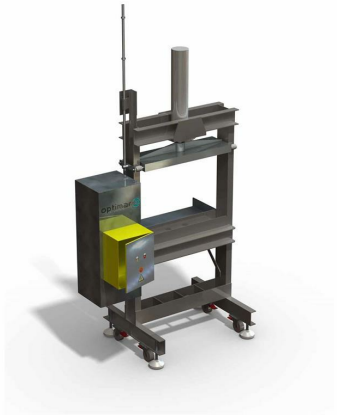

Optimar AS
Valderøyvegen 1129, NO-6050 Valderøya
+47 70 10 80 00 / info@optimar.no
www.optimar.no